


LONKING



5-7t
E Series Counterbalance
Electric Forklift Truck


Configuration	Multi Function Display	Driving/lifting/steering Computer Controlled	Pedal Rubber	Lithium Battery	Emergency Stop Switch
	Full Set of LED Lights	Reversing Buzzer	Safety seat	Full-hydraulic Power Steering	Wide view mast
	Low Resistance Tyres	Tow-piece Multiplex Valve	High Efficiency AC Drive Motor	Gear Pump with Low Noise	Energy Efficient Dynamic Signal
	Load Sensing Hydraulic System	Roof Weather Canopy	Charging Indicator	Electric Horn	Backup Mirror
	Traction Pin	Tool Box	Standard Forks	Lift, Tilt, Levers	
Optional	Cabin	Cold A/C	Heater	Suspension Seat	Lifting Potentiometer
	Battery Charger	Lithium Battery	Rotating Buzzer Warning Light	Rear Working Light	Warning Light
	Solid Tyres	Non Marking Tyres	Large Capacity Battery	Tailored backrest	Widen Fork Carriage
	Protective Net	Electric Fan	Reversing Handrail Horn	Corner Positioner	Reversing Radar
	Fork Extensions	Tilt cylinder protection	Steering cylinder protection	Custom Colours	Multiple Hydraulic Attachments
	Reversing Voice Horn				

Load Curve

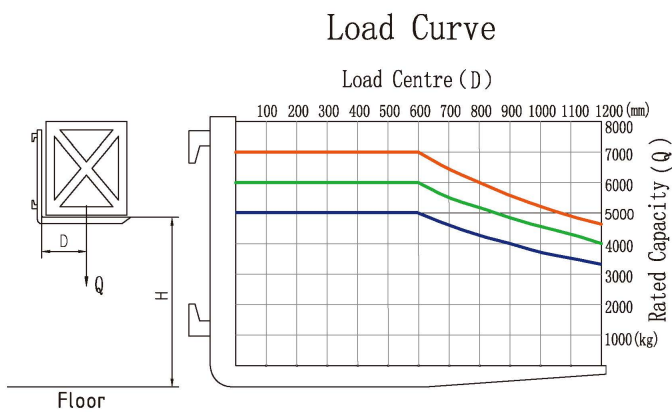


Note: The vertical axis represents the rated lifting weight, and the horizontal axis represents the load center distance. The load center is calculated from the front of the fork, and the base point of the standard load refers to the center position of a cube with a load side length of 1000 mm. When the mast is tilted forward, non-standard forks are used, or loads exceeding the normal width are loaded, the load capacity will be reduced. Through the load curve chart, the carrying capacity of various load centers can be understood in time.

Structure Diagram

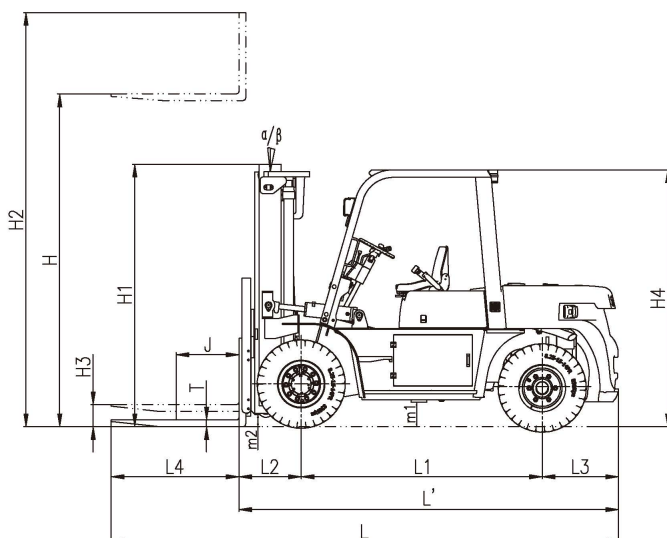

Ast : Right Angle Stacking Aisle Width
a : Clearance

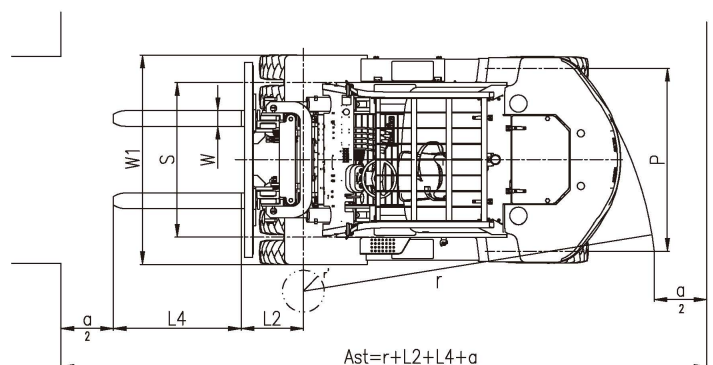

Mast Type	Mast Model	H2 Max Lifting Height (mm)	Load Capacity (J=600mm) (kg)			H1 Lowered Mast Height(mm)	H3 Free Lifting Height (mm)		Mast Tilting Angle (°)α/β
			CPD50	CPD60	CPD70		CPD50/60	CPD70	
2 Stage Standard Mast-Super Wide Field	M200	2000	5000	6000	7000	2000	206	211	10/12
	M250	2500				2250			
	M270	2700				2350			
	M300	3000				2500			
	M330	3300				2650			
	M350	3500				2750			
	M375	3750				2875			
	M400	4000				3050			
	M425	4250				3175			
	M450	4500				3300			
	M475	4750				3425			
	M500	5000				3550			
	M550	5500	4750	5700	6600	3850			
	M600	6000	4400	5400	6400	4100			
2 Stage Free Mast	ZM200	2000	5000	6000	7000	1960	980	985	10/12
	ZM225	2250				2085	1105	1110	
	ZM250	2500				2210	1230	1235	
	ZM270	2700				2310	1330	1335	
	ZM300	3000				2460	1480	1485	
	ZM330	3300				2610	1630	1635	
	ZM350	3500				2710	1730	1735	
	ZM370	3700				2810	1830	1835	
	ZM400	4000				3010	2030	2035	
	ZM425	4250				3135	2155	2160	6/6
	ZM450	4500				3260	2280	2285	
	Note: The free lifting height with backrest minus 402mm.								
3 Stage Free Mast	ZSM320	3200	4800	5900	6500	2205	1247	1252	10/12
	ZSM360	3600	4500	5600	6200	2335	1377	1382	
	ZSM400	4000				2465	1507	1512	
	ZSM435	4350				2585	1627	1632	
	ZSM450	4500				2635	1677	1682	
	ZSM480	4800				2735	1777	1782	
	ZSM500	5000				2805	1847	1852	
	ZSM540	5400	4200	5300	6000	2990	2032	2037	6/6
	ZSM600	6000	4000	5000	5500	3190	2232	2237	
	ZSM630	6300	3800	4600	5000	3290	2332	2337	
	ZSM650	6500	3600	4300	4500	3355	2397	2402	
	ZSM700	7000	3000	3300	3800	3545	2587	2592	
Note: The free lifting height with backrest minus 424mm.									

Note: Load capacity is reduced 300kg with optional side shifter for 5-7t forklift.



LONKING



LONKING HOLDINGS LIMITED
LONKING (SHANGHAI) FORKLIFT SALES CO.,LTD.

Add:196,Xinrun Road,Xinqiao,Songjiang Industrial,Zone Shanghai
 Sales Hot-line:+86-21-37602160 sales hotline:+86-400-021-6969
 Fax:+86-21-61303339-8195 E-mail:ccfw@lonking.cn
<http://www.lonking.cc> P.C:201612



OHSAS45001:2023



ISO14001:2015



ISO9001:2015



CE CERTIFICATE



UKCA CERTIFICATE

